


CLA-VAL PCM 40-01

Rate of Flow Control Valve Actuated Pilot 4-20 mA

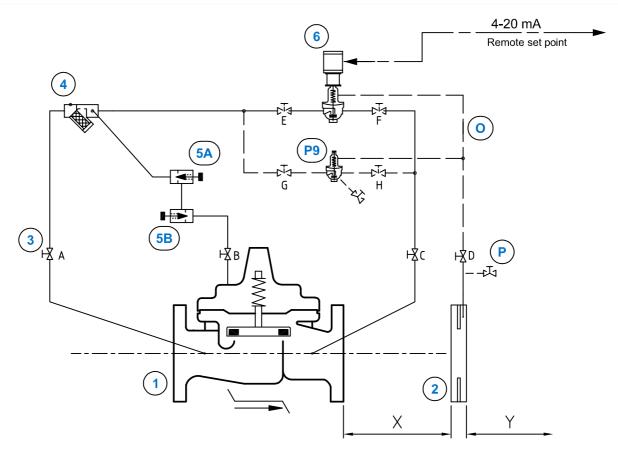

STANDARD EQUIPMENT					
No	Description	Qty	Type		
1	MAIN VALVE HYTROL AE/GE/NGE	1	100-01		
2	ORIFICE PLATE ASSEMBLY	1	X52-A		
3	ISOLATION BALL VALVE	4	RB-117		
4	STRAINER WITH INCORPORATED ORIFICE	1	X44-A		
5A	ONE-WAY FLOW CONTROL (OPENING SPEED)	1	CV		
5B	ONE-WAY FLOW CONTROL (CLOSING SPEED)	1	CV		
6	POSITIONING MOTORIZED DIFFERENTIAL PRESSURE CONTROL	1	CDHS-34		

OPTIONAL FEATURES				
No	Description	Qty	Type	
0	NYLON PIPE Ø 6/3 mm	1	-	
Р	2-WAY PRESSURE COCK (Rp 3/8")	2	RB-117	
P9	DIFFERENTIAL PRESSURE CONTROL	1	CDHS-18 + RB117	

NOTES

AE/GE: DN 32 - DN 400 / NGE: DN 50 - DN 600 OPTIONAL FEATURES: ————

Orifice plate assembly X52-A (2) may be fixed directly to the main valve outlet flange, however, better control is obtained, if it is mounted according to the following recommendation: distance X = 5x pipe diameter, distance Y = 3x pipe diameter.

► CLA-VAL Europe www.cla-val.ch cla-val@cla-val.ch 1 - 040601FE D 01/15