
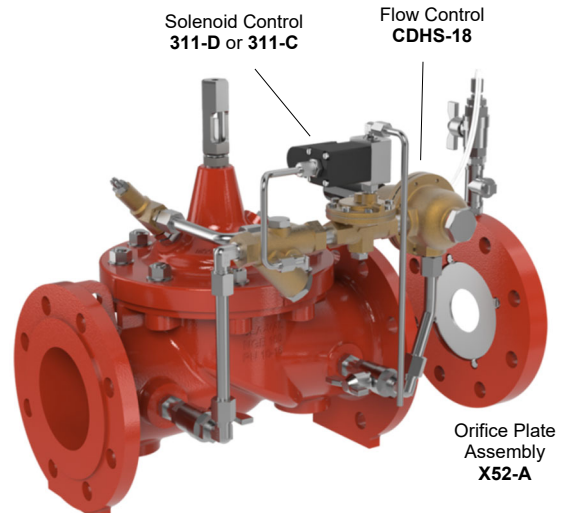


### ► Simple, Reliable and Accurate

- Completely Automatic Operation
- Easy Adjustment and Maintenance
- Quality Approved Materials
- World Wide Support

#### ► CLA-VAL SERIES 40 Main Function

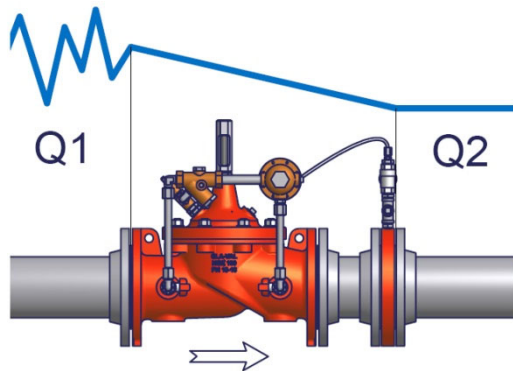

The CLA-VAL SERIES 40 is used to accurately limit excessive flow to a preselected maximum rate (Flow Control) regardless of changes in pressure and/or varying inlet flow.

The Orifice Plate Assembly is included.

#### ► CLA-VAL 43E/D-01 Typical Application


The CLA-VAL 43E/D-01 is designed to deliver a constant flow while opening or closing remotely. The solenoid can be activated by an electrical signal from a timer or programmer e-Smart/L1.

This valve is also used to increase flow in a downstream area when a fire occurs. Using a timer the valve can deliver a constant flow at fixed hours during the day (e-Smart/L1).

#### *Make your valve even Better!*

LFS Option?	<u>Control</u> Low flows or night flows
KO Option?	<u>Extend</u> valve life with Anti-Cavitation trim
KG1 Option?	<u>Use</u> stem cleaning for harsh water
Maintenance?	<u>Check</u> on periodic maintenance
Environment?	<u>Adapt</u> to high temperatures or frost risk
Security?	<u>Add</u> hydraulic safety back-up to your valve
Protection?	<u>Remove</u> excessive system overpressures
Corrosion?	<u>Protect</u> your valve with upgraded materials

*Not just Products but Solutions: contact CLA-VAL!*

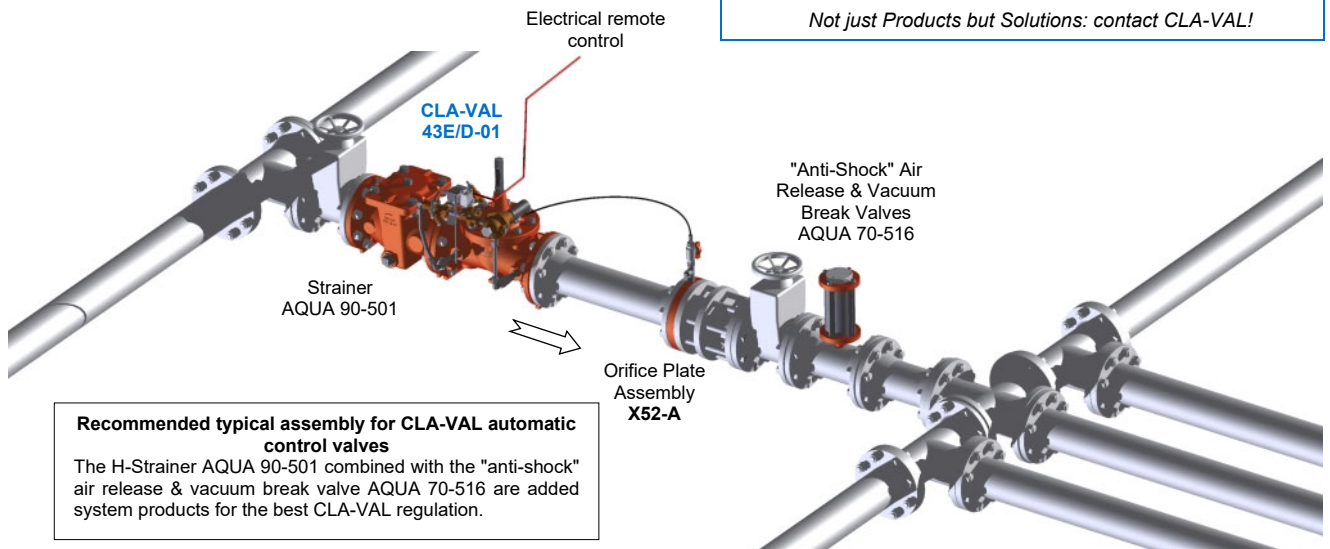

**Recommended typical assembly for CLA-VAL automatic control valves**  
The H-Strainer AQUA 90-501 combined with the "anti-shock" air release & vacuum break valve AQUA 70-516 are added system products for the best CLA-VAL regulation.