
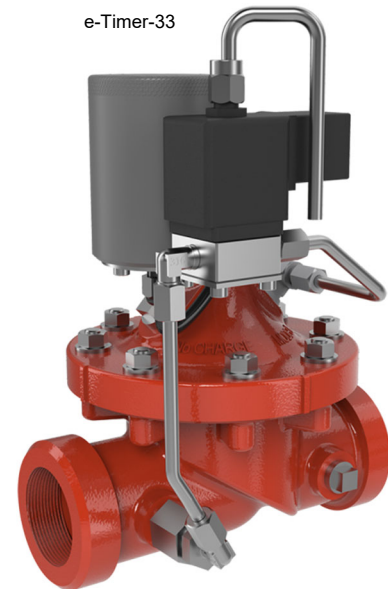


► Simple, Reliable and Accurate

- Completely Automatic Operation
- Easy Adjustment and Maintenance
- Quality Approved Materials
- World Wide Support

► CLA-VAL ECO 32-27 Main Function

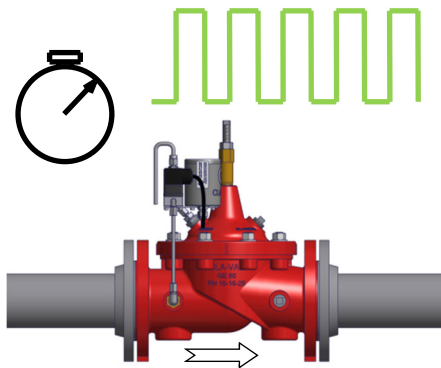

CLA-VAL ECO SERIES products include a CLA-VAL valve and battery powered autonomous electronic controller.

These controllers extend the traditional range of applications of CLA-VAL valves by adding TIME, FLOW or SWITCH controls.

► CLA-VAL ECO 32-27 Typical Application

The CLA-VAL ECO 32-27 is a flushing valve designed to Open/Close valves allowing smooth flushing of a pipeline or network. The user defines the Opening/Closing times.

Programming is time based only. Water velocity through the valve is controlled by adjusting cover mechanical opening control. The electronic controller e-Timer-33 is programmed according to customer needs.

When opening time is reached valve opens automatically allow smooth flushing of the pipe line.

Make your valve even Better!

LFS Option?	<u>Control</u> Low flows or night flows
KO Option?	<u>Extend</u> valve life with Anti-Cavitation trim
KG1 Option?	<u>Use</u> stem cleaning for harsh water
Maintenance?	<u>Check</u> on periodic maintenance
Environment?	<u>Adapt</u> to high temperatures or frost risk
Security?	<u>Add</u> hydraulic safety back-up to your valve
Protection?	<u>Remove</u> excessive system overpressures
Corrosion?	<u>Protect</u> your valve with upgraded materials

Not just Products but Solutions: contact CLA-VAL!

Recommended typical assembly for CLA-VAL automatic control valves

