




CLA-VAL 134E/D-83

Deluge Solenoid Control Valve, Equipped with Manual Bypass Valve and Pressure Reducing Feature (Sea water Fire Deluge Service)

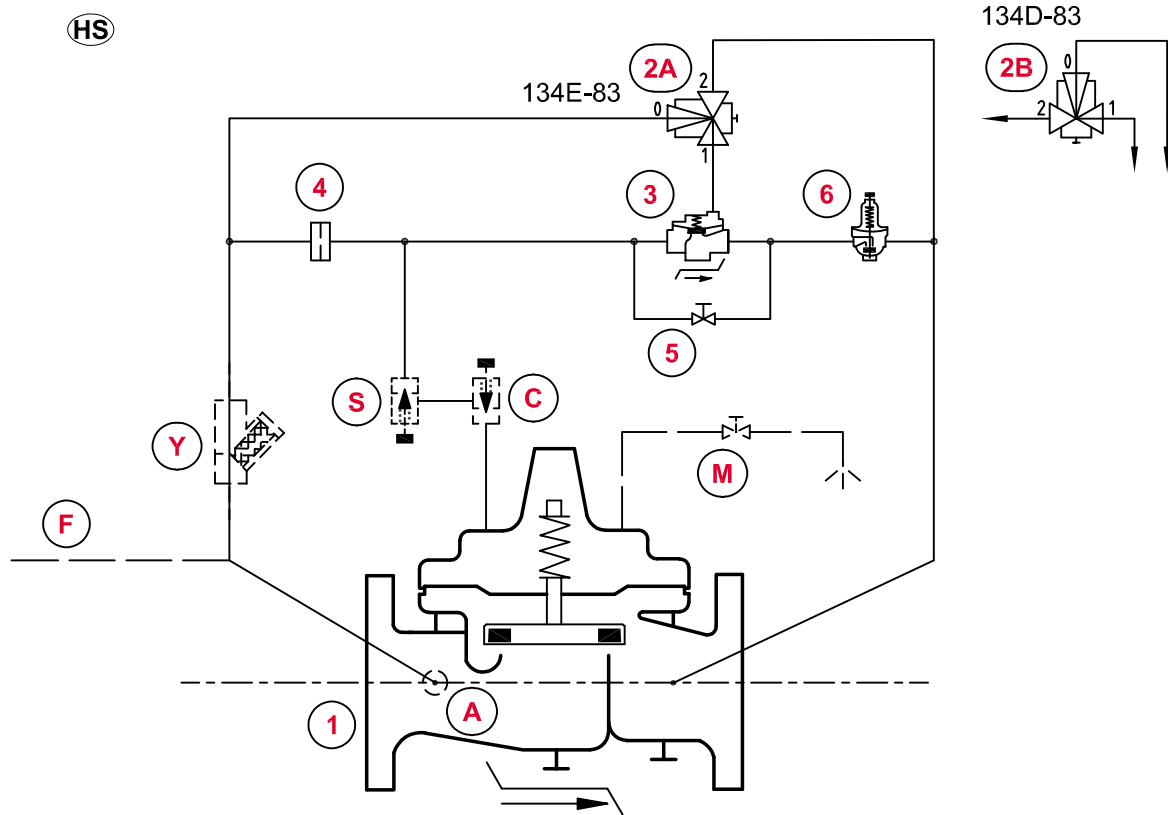

STANDARD EQUIPMENT

No	Description	Qty	Type
1	MAIN VALVE HYTROL-DELUGE AE/GE/NGE	1	100GS/GSKX
2A	3-WAY SOLENOID VALVE (NO)	1	311-D
2B	3-WAY SOLENOID VALVE (NC)	1	311-C
3	AUXILIARY VALVE HYTROL	1	100-KHR
4	RESTRICTION ASSEMBLY	1	X58C-CSA
5	ISOLATION BALL VALVE	1	RB-117
6	PRESSURE REDUCING CONTROL	1	CRD

OPTIONAL FEATURES

No	Description	Qty	Type
A	FLOW CLEAN STRAINER	1	X46A
C	ONE-WAY FLOW CONTROL (CLOSING SPEED)	1	CV
F	REMOTE SENSING	1	-
M	MANUAL OPERATOR	1	RB-117
S	ONE-WAY FLOW CONTROL (OPENING SPEED)	1	CV
Y	STRAINER	1	X43

NOTES

AE/GE : DN 80 - DN 400
 * Main Valve 100GS on DN 80 - 100 - 150 -200 & 250
 100GS/KX on DN 300 & 400

OPTIONAL FEATURES : _____
 NOT FURNISHED BY CLA-VAL : _____