




CLA-VAL 341GF


Heavy Duty Refueling Nozzle

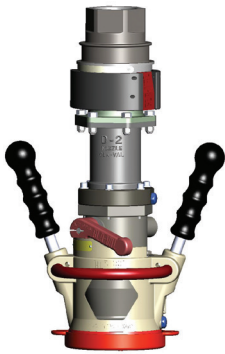

**341GF Nozzle with
D2 & Dry Break**

- **Conforms to SAE-AS5877**
- **Connects to MS24484 Single Point Adapter**
- **Low Pressure Drop**
- **All Aluminum and Stainless Steel Construction**
- **Safety Interlock with Square Pins**
- **Convenient Guard Bar Hand Grip**
- **Guard Bar Protects Operating Handle**


The Cla-Val Model 341GF Nozzle is a refueling nozzle for pressure fuel servicing of aircraft, and for bottom loading of tank trucks.

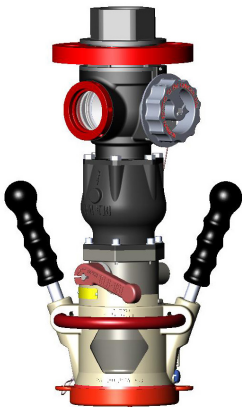


**341GF Nozzle with
HEPCV & Strainer Ball Valve**

To ensure maximum safety during refueling, the Cla-Val 341GF Nozzle has primary and secondary interlock systems. The primary interlock ensures that the nozzle cannot be opened when it is not connected to an aircraft adapter. The secondary interlock protects the 341GF Series Nozzle from hazards of interfacing with badly worn aircraft adapters. Even when used with a badly worn adapter, the nozzle is safer because it uses square register pins that provide positive alignment with the square slots in the adapter. In addition, the nozzle cannot be removed from the adapter until the operating lever is rotated to the fully-closed position.

To achieve maximum strength and durability, the Cla-Val 341GF Nozzle uses a stainless steel bayonet ring cast within the aluminum collar of the nozzle. The crank shaft of the nozzle extends across the entire width of the interior flow path and is supported from end-to-end by a structural wall that splits the flow path. This wall supports the crank shaft while straightening the flow and keeping flow resistance as low as possible. To reduce aircraft refueling times, the flow resistance through the Cla-Val 341GF Nozzle has the lowest head loss, which means it can fill an aircraft faster than any other nozzle.

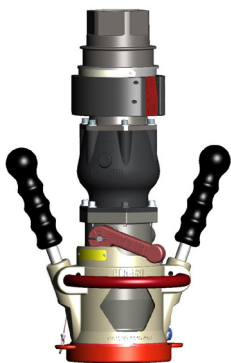


**341GF Nozzle with
HEPCV & Dry Break**



**341GF Nozzle
Connection View**

Pressure Drop Data

341GF PRESSURE DROP CURVES

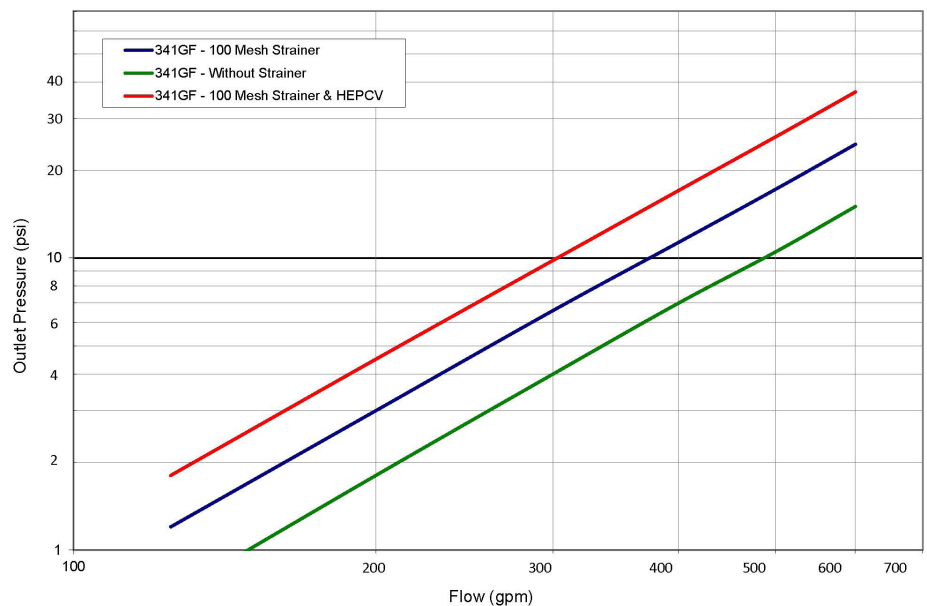




CLA-VAL 341GF

Heavy Duty Refueling Nozzle


Model Numbering Scheme

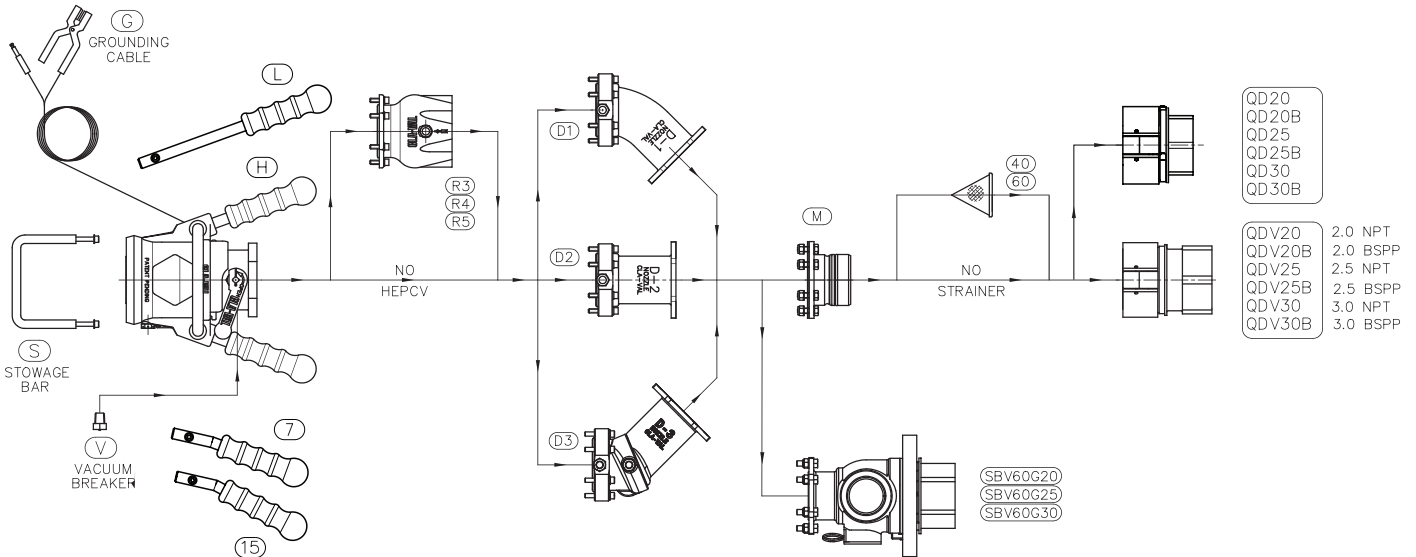


Create Complete Model Numbers for Various Applications

It is easy to customize a 341GF Refueling Nozzle to special requirements. Complete model numbers always begin with "341GF". Add your option selections to this base model number, following the flow chart above from left to right. See example below.

341GF- G V D3 M 60 QDV25

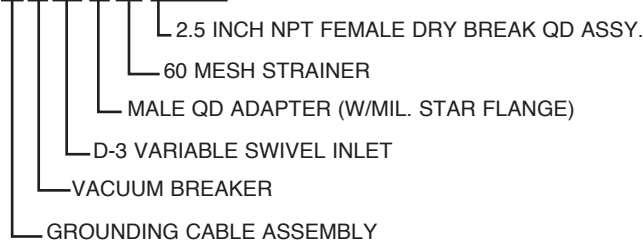

341GF-R5 D3 100 SBV 30

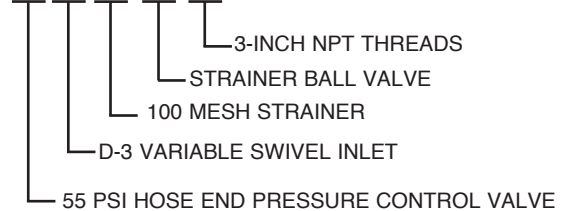

Available Options for Model 341GF

H	STANDARD HANDLES
L	LONG HANDLES
7	STANDARD HANDLES WITH 7° BEND
15	STANDARD HANDLES WITH 15° BEND
G	GROUNDING CABLE
V	VACUUM BREAKER
S	STOWAGE BAR
R3	35 PSIG HEPCV WITH FLANGED OUTLET
R4	45 PSIG HEPCV WITH FLANGED OUTLET
R5	55 PSIG HEPCV WITH FLANGED OUTLET
D-1	D-1 ELBOW SWIVEL INLET
D-2	D-2 STRAIGHT SWIVEL INLET
D-3	D-3 VARIABLE SWIVEL INLET
M	MALE QUICK DISCONNECT ADAPTER




40	40 MESH STRAINER
60	60 MESH STRAINER
100	100 MESH STRAINER
QD	STANDARD QUICK DISCONNECT
QDV	DRY BREAK QUICK DISCONNECT
SBV	349GF STRAINER BALL VALVE
B	BLANK SBV INSPECTION COVER
G	GLASS SBV INSPECTION COVER
20	2-INCH NPT THREADS
20B	2-INCH BSPP THREADS
25	2.5-INCH NPT THREADS
25B	2.5-INCH BSPP THREADS
30	3-INCH NPT THREADS
30B	3-INCH BSPP THREADS




CLA-VAL 341GF

Heavy Duty Refueling Nozzle

Envelope Dimensions

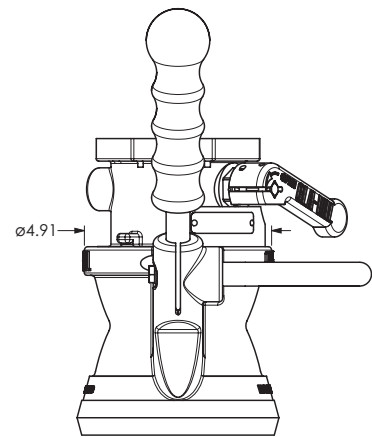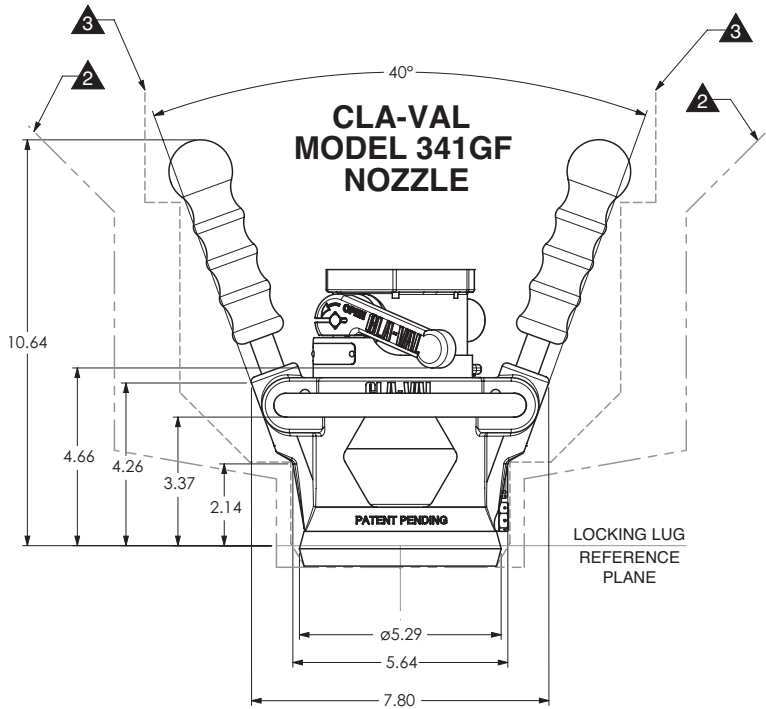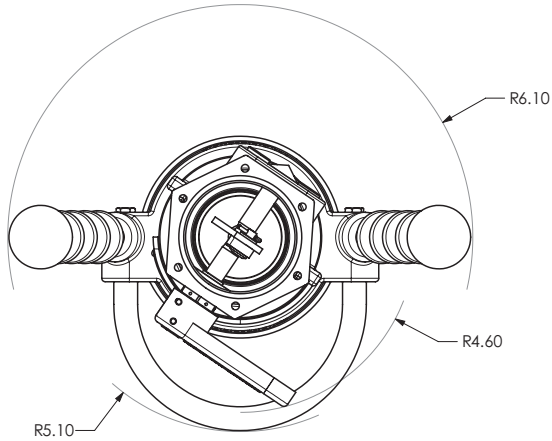

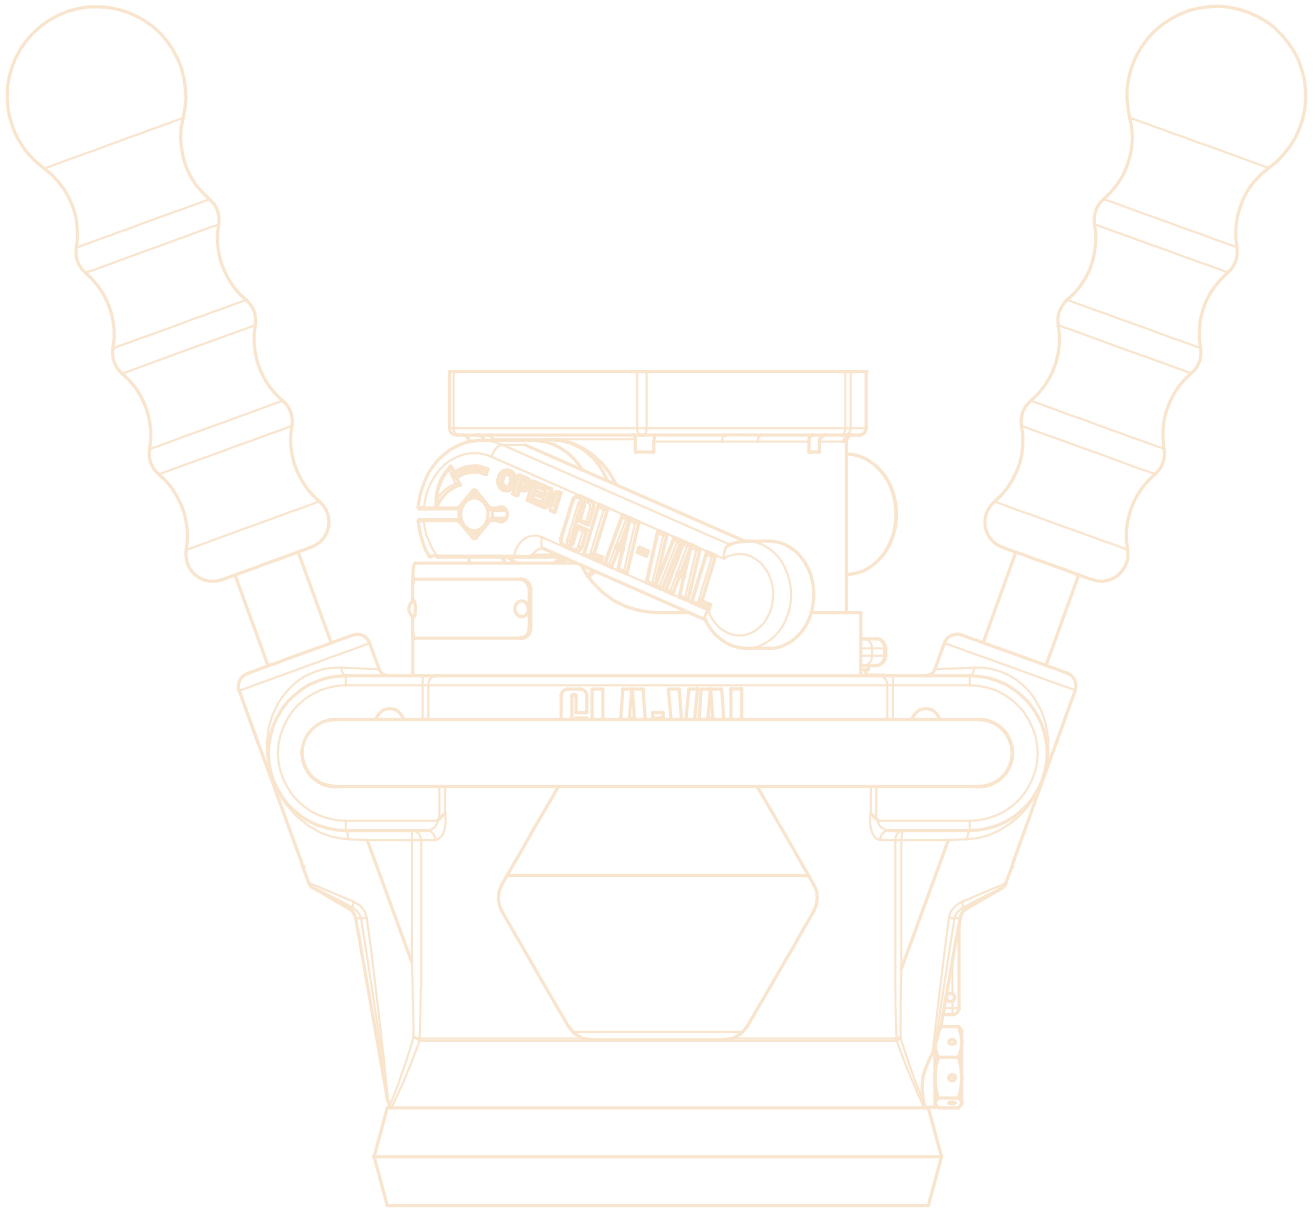

**CLA-VAL
GLOBAL HEADQUARTERS**
1701 Placentia Avenue
Costa Mesa, CA 92627
Phone: 800-942-6326
Fax: 949-548-5441
E-mail: info@cla-val.com

CLA-VAL EUROPE
Chemin des Mésanges 1
CH-1032 Romanel/
Lausanne, Switzerland
Phone: 41-21-643-15-55
www.cla-val.ch
E-mail: cla-val@cla-val.ch

CLA-VAL PACIFIC
45 Kennaway Road
Woolston, Christchurch, 8023
New Zealand
Phone: 64-39644860
www.cla-valpacific.com
E-mail: info@cla-valpacific.com